

TALON M/S



MINI SKID STEER

MODELS:
700HPX



Talon M/S 700HPX shown


MEET THE HARDEST WORKER ON THE JOB SITE.

Dixie Chopper is now known for more than mowers. Meet the Talon M/S, a heavy-duty mini skid steer built for commercial contractors who do more than mowing. This new model is loaded with features, including:


- **Diesel Power** - Reliability and efficient power comes standard with the 24.8 horsepower Kubota engine.
- **Gate Friendly** - The 700HPX offers a hydraulically expandable undercarriage to retract the unit width less than 36" to fit in tight spaces.
- **Hydraulic Flow** - Delivering up to 42.7 lpm to the auxiliary hydraulic flow, the Talon M/S attachments make easy work of tough jobs.
- **All-Day Comfort** - The spring assisted stand-on platform design with generous hip padding provide operator comfort from start to finish.
- **Productivity** - With the expandable undercarriage and speeds up to 7 km/h, operators can safely and quickly get work done in record time.
- **Compatibility** - Universal compact utility loader mounting plate and quick-attach system to easily switch between most standard attachments.

AVAILABLE ACCESSORIES

- Pallet Forks
- Bucket
- Snow Blade
- Dozer Blade
- Auger
- Trencher
- Broom
- Grapple



Kubota Diesel - Quiet, powerful, and reliable diesel engine

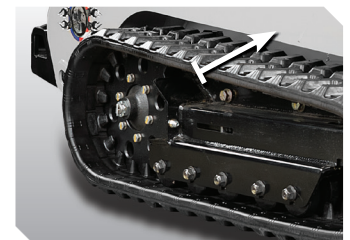

Expandable Tracks - Narrow for tight spaces or wider for better stability



Heavy Loads - Get more work done with 315+ kilograms of operating capacity

1 YEAR
BUMPER-TO-BUMPER
WARRANTY*

*Unlimited hour limited warranty, see dealer for complete warranty details



TALON M/S



Model	700HPX
Engine	
Manufacturer	Kubota*
Horsepower	24.8
Fuel Type	Diesel
Fuel capacity	34 Litres
Cooling	Liquid
Starter	Electric
Engine warranty	2-Year

Hydraulic System	
Hydraulic capacity	90.5 litres
System flow (total)	102.5 LPM
Hydraulic flow aux (high/low)	42.7 (high), 32.9(low) LPM
Hydraulic flow (drive)	26.8 LPM
System pressure	3000 PSI

Tracks	
Track gauge	33.75"
Track width	9"
Ground speed	7 km/h
Ground Pressure	4.21 PSI

Dimensions	
Weight (no attachment)	1306 kg
Length (no attachment)	77"
Length (with bucket)	96"
Width (fully retracted)	34.5"
Width (fully extended)	43.5"
Height (boom lowered)	54"
Height (boom raised)	98"
Hinge pin height	77"
Dump height	60"
Dump angle	37 degrees
Reach	34"
Tip capacity	916 kg
Operating capacity (35% of tip load)	320 kg
Ground clearance	5"